

 **WaterTech**



COMPANY
MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =
= ISO 14001 =



MID MI-001

Woltmann axial helix type
water meter, dry dial

OMEGA SDO

OMEGA SDC

Woltmann axial helix type water meter, dry dial

PERFORMANCE ACCORDING TO MID 2004/22/CE DIRECTIVE

SIZE		PERMANENT FLOW Q_3 (m ³ /h)	MAXIMUM FLOW Q_4 (m ³ /h)	TRANSITIONAL FLOW Q_2 (L/h)	MINIMUM FLOW Q_1 (L/h)	WORKING PRESSURE* (bar)	MINIMUM READING (L)	MAXIMUM READING (m ³)	TEMPERATURE CLASS
(mm)	(inch)								
50	2"	40	50,00	800	500	16	0,5	999.999	T30/T50
65	2 1/2"	63	78,75	1260	788	16	0,5	999.999	T30/T50
80	3"	63	78,75	1260	788	16	0,5	999.999	T30/T50
100	4"	100	125,00	2000	1250	16	0,5	999.999	T30/T50
125	5"	160	200,00	3200	2000	16	0,5	999.999	T30/T50
150	6"	250	312,50	5000	3125	16	5	9.999.999	T30/T50
200	8"	400	500,00	8000	5000	16	5	9.999.999	T30/T50
250	10"	630	787,50	12600	7875	16	50	99.999.999	T30/T50
300	12"	1000	1250,00	20000	12500	16	50	99.999.999	T30/T50
400	16"	1600	2000,00	32000	20000	16	50	99.999.999	T30/T50
500	20"	2500	3125,00	50000	31250	16	50	99.999.999	T30/T50

*PN 10 and PN 25 on request


Metrological class MID (Q_3/Q_1) R = 80 (different R are available on request)

Rev. 3/2015 The content of this data sheet is intended to give general information only, we reserve the right to make alterations without prior notification




Copper-can as standard version

TYPICAL ERROR CURVE

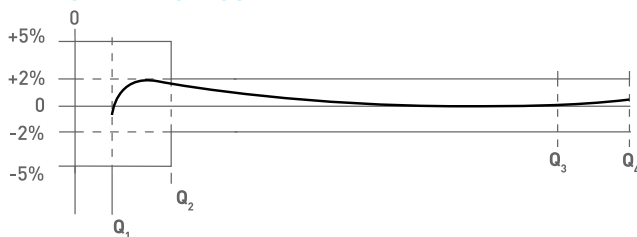


PRESSURE LOSS DIAGRAM

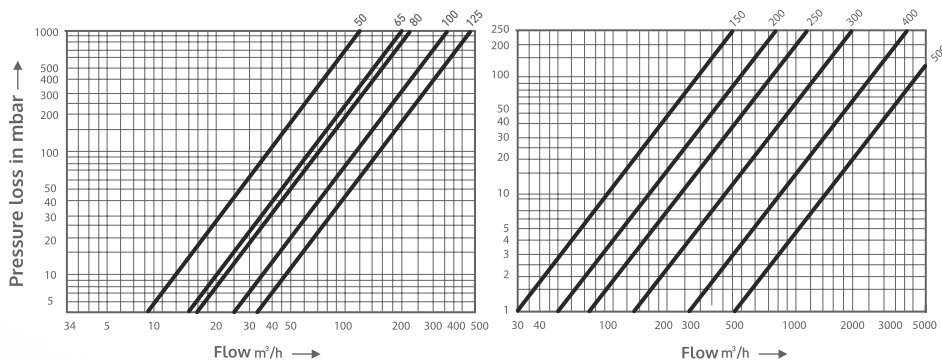

DIMENSIONS

(mm)	50	65	80	100	125	150	200	250	300	400	500
SIZE (inch)	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	16"	20"
L (mm)	200	200	225	250	250	300	350	450	500	600	800
H (mm)	252	262	272	282	297	341	371	480	516	647	785



For additional information and options, do not hesitate to contact us

WATERTECH S.P.A. - Water meters

Factory, commercial main office and administration: Str. Antica Fornace, 2/4 • 14053 Canelli (AT) – Italy
Tel +39 0141 822106-832151 • **Fax** +39 0141 832191-832198 • **Mail** info@wtmeters.it • **Web** www.wtmeters.it